

Sliding door system for overlay door position

► TopLine XL / top running



Advanced technology, discreet look

Floor to ceiling, large format sliding door units make statements and provide visual clarity in a room. The new TopLine XL sliding door fitting from Hettich is the key to creating cabinets with a focus on exquisite design.

The system sets new standards in terms of practical convenience and secure, straightforward installation.



Impressive user convenience:
Easily opens, gently closes, minimal noise.



Perfect finish:
Stick on decorative tapes in three colours add a finishing touch to the runner profile.



Elegant clip in installation:
Floor to ceiling cabinets without visible screws.



Practical convenience:
The centre door intuitively opens to the right and left.



Innovative floor standing guard:
Doors can be set on the floor without damaging them, the guide components glide up automatically.



Perfect overlay adjustment:
Tool-less adjustment of closed doors with immediately visible results.



Simple height adjustment:
From the front when doors are closed or from the side if they are very close to the ceiling.




hettich.com/short/69f314

Find out more:
You can get inspiration and further product details on our website.


Sliding door system for overlay door position

- TopLine XL / top running
- Summary



Performance summary

- Design principle
- General information
- Door format and door weight



Planning dimensions in brief



System components



Accessories



hettich.com/short/4514cb


Hettich Technical Assistant

- Planning dimensions and installation
- Settings
- Service


Sliding door system for overlay door position

- ▶ TopLine XL / top running
- ▶ Performance summary


Design principle

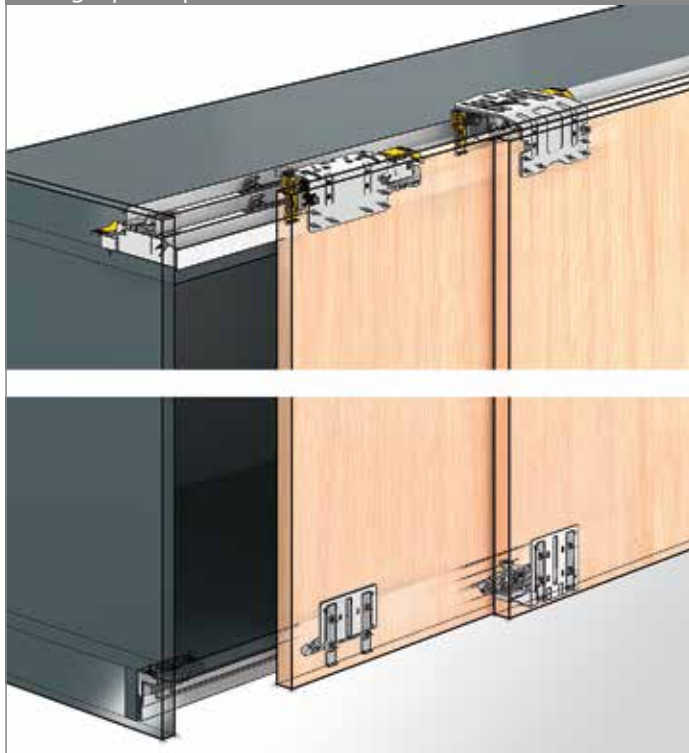

General information




Door format and door weight

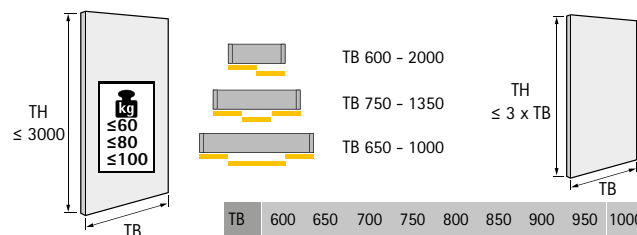


hettich.com/short/8681f2


Number of doors and door position



Height / overlay adjustment

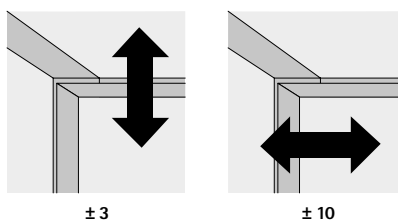

Door material



Silent System

	2-door	3-door	4-door
Soft closing			
Soft opening			

- ▶ TopLine XL / top running
- ▶ Planning dimensions in brief

Technical drawings of the 1000 Series door handle, showing side and front views with dimensions.

Side View (Top):

- Overall height: ≥ 45
- Mounting plate height: 60
- Handle height: 18
- Mounting plate width: 120
- Overall width: 152
- Mounting plate thickness: 8
- Mounting plate width (left): 18, 19, 50
- Mounting plate width (right): 18, 19, 50
- Mounting plate height (left): 23, 16, 16

Side View (Bottom):

- Overall height: 60
- Mounting plate height: 43
- Handle height: 6
- Mounting plate width: 50
- Overall width: ≥ 65
- Mounting plate thickness: 8
- Mounting plate width (left): 32, 23
- Mounting plate width (right): 17

[illegible]

Technical drawings of four bolted flange connections (a, b, c, d) showing dimensions and bolt specifications.

Connection (a): Dimensions: 65, 128, 23, 16, 16, 32, 64, 32. Bolt specifications: $\emptyset 8 \times 12$, $\emptyset 5 \times 12$. Bolt icon: $\emptyset 6,3 \times 14$.

Connection (b): Dimensions: 128, 65, 23, 16, 16, 32, 64, 32. Bolt specifications: $\emptyset 8 \times 12$, $\emptyset 2 \times 12$. Bolt icon: $\emptyset 4 \times 16$.


Connection (c): Dimensions: 32, 23, 97, 64. Bolt specification: $\emptyset 5 \times 12$.

Connection (d): Dimensions: 64, 97, 32, 23. Bolt specification: $\emptyset 2 \times 12$.

Sliding door system for overlay door position

- ▶ TopLine XL / top running
- ▶ System components


System summary

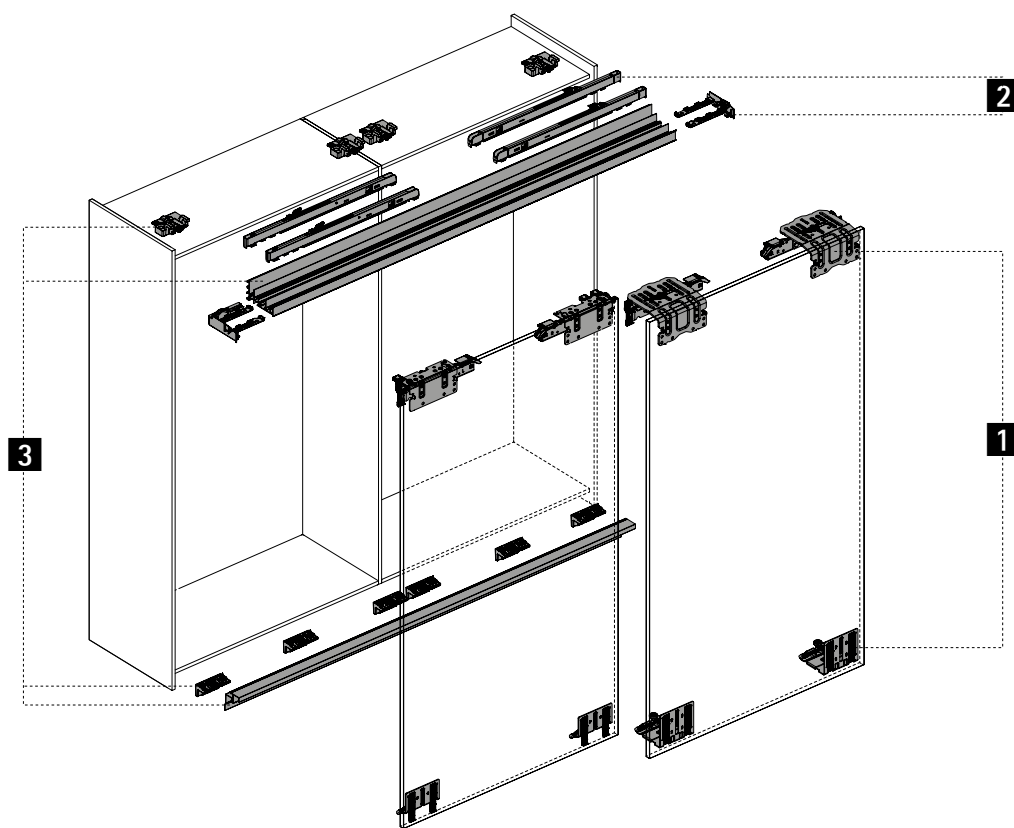

1 Runner and guide components



2 Silent System

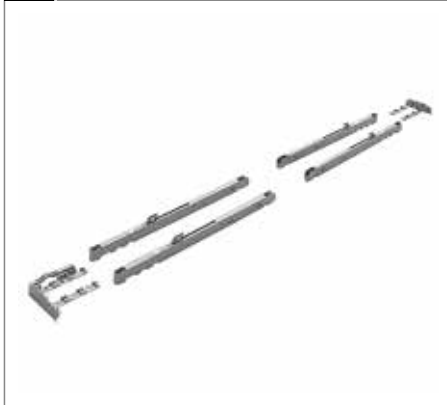

3 Runner and guide profiles



4 System accessories




Sliding door system for overlay door position

- ▶ TopLine XL / top running
- ▶ System components

1 Set of running and guide components

- ▶ Set contains all running and guide components for 2 / 3 / 4-door sliding door cabinets and wardrobes

Illustration*	Bottom guide system version	Maximum door thickness mm	Maximum door weight kg	Order no. / number of doors			PU
				2-door 	3-door 	4-door 	
	STB 19 17 mm	18 - 30	60	9 275 796	9 275 786	9 278 780	1 set
		22 - 30	80	9 275 794	9 275 785	9 278 791	1 set
		30 - 40	80	9 275 793	9 275 784	9 278 792	1 set
		32 - 40	100	9 275 787	9 275 783	9 278 793	1 set
		40 - 50	100	9 275 740	9 275 782		1 set
	STB 19 33 mm	18 - 30	60	9 275 788	9 275 781	9 278 794	1 set
		22 - 30	80	9 275 790	9 275 709	9 278 795	1 set
		30 - 40	80	9 275 792	9 275 741	9 278 796	1 set
		32 - 40	100	9 275 708	9 275 707	9 278 797	1 set
		40 - 50	100	9 275 739	9 275 706		1 set

2 Silent System

Set packaging

- ▶ Set contains soft closing and opening elements as well as end caps
- ▶ 3-door set includes middle door Silent System for opening the door to the left and right
- ▶ 4-door set includes synchronisation components for simultaneously opening the middle doors

Illustration	Door weight kg	Order no. / number of doors				PU
		2-door 	3-door 	3-door 	4-door 	
	15 - 35	9 276 735	9 276 648	9 276 645	9 278 798	1 set
	30 - 80	9 276 732	9 276 647	9 276 643	9 278 799	1 set
	60 - 100	9 276 737	9 276 649	9 276 646		1 set

Bulk packaging

Illustration	Description	Door weight kg	Order no.	PU
	Silent System soft closing / soft opening ▶ Soft closing ▶ Soft opening	15 - 35	9 272 696	100 ea.
		30 - 80	9 272 693	100 ea.
		60 - 100	9 272 695	100 ea.
	Middle door Silent System ▶ Soft closing middle door ▶ Doors can be opened in both directions	15 - 35	9 276 482	25 ea.
		30 - 80	9 276 488	25 ea.
		60 - 100	9 276 481	25 ea.
	End cap, left		9 273 066	100 ea.
	End cap, right		9 269 766	100 ea.

Sliding door system for overlay door position

- ▶ TopLine XL / top running
- ▶ System components

3 Runner and guide profiles

Set packaging

Profile set

- ▶ Set contains one runner and one guide profile for clip on installation and clips for profile attachment
- ▶ On request, Silent System elements can be premounted for customised sets
- ▶ Runner / guide profiles: aluminium, silver anodised

Illustration	Length mm	Order no.	PU
	2300	9 278 672	1 set
	4000	9 278 657	1 set
	individual	on request	100 set

Set of clips for profile attachment

- ▶ Set contains clips for attaching runner and guide profile to the cabinet body

Illustration	Max. cabinet width in mm	Order no.	PU
	3000	9 277 708	1 set
	4000	9 278 080	1 set

Bulk packaging

Runner profile

- ▶ Aluminium

Advice:

- ▶ The "medium duty" or "heavy duty" profile type must be used in conjunction with clip mounting
- ▶ The "heavy duty" profile type must be used in conjunction with middle door Silent System
- ▶ The "heavy duty" profile type must be used in conjunction with 4-door synchronisation

Illustration	Profile version	Finish	Length mm	Order no.	PU
	light	anodised	5300	9 276 715	4 ea.
			individual	LA 12010	100 ea.
	medium	anodised	2300	9 278 127	4 ea.
			4000	9 277 974	4 ea.
			5300	9 276 716	4 ea.
			individual	LA 11910	100 ea.
	heavy duty	anodised	2300	9 278 099	4 ea.
			4000	9 277 975	4 ea.
			5300	9 276 717	4 ea.
			individual	LA 11810	100 ea.

Advice

- ▶ Locking systems
- ▶ Accessories for sliding and folding door systems
- ▶ Design advice



hettich.com/short/185611

Sliding door system for overlay door position

- ▶ TopLine XL / top running
- ▶ System components

Bulk packaging

Guide profile



- ▶ Aluminium

Illustration	Profile version	Finish	Length mm	Order no.	PU
	STB 19.0 for clip attachment	anodised	2300	9 278 125	4 ea.
			4000	9 277 972	4 ea.
			5300	9 276 712	4 ea.
			individual	LA 11770	100 ea.
	STB 19.1 for attachment in screw slot	anodised	2300	9 278 126	4 ea.
			4000	9 277 973	4 ea.
			5300	9 276 713	4 ea.
			individual	LA 11849	100 ea.

Clips for profile attachment

Illustration	Description	Order no.	PU
	Clip for runner profile	9 272 814	200 ea.
	Clip for guide profile	9 268 516	300 ea.

Information on ordering clip quantity

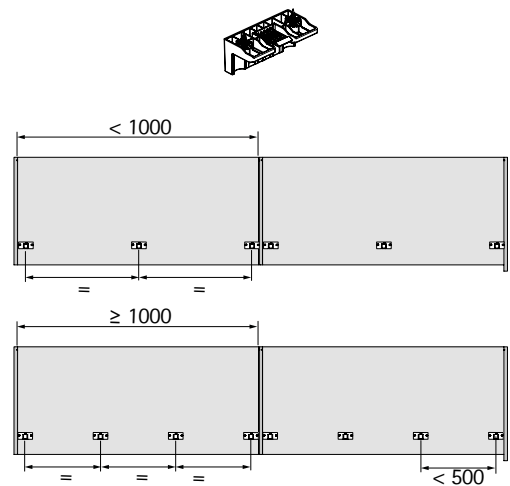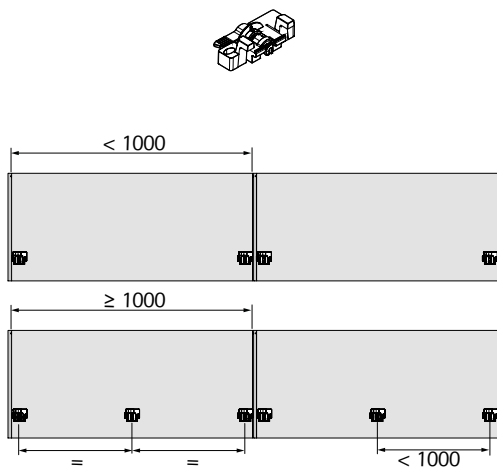

Advice

- ▶ Locking systems
- ▶ Accessories for sliding and folding door systems
- ▶ Design advice




hettich.com/short/185611

Sliding door system for overlay door position

- ▶ TopLine XL / top running
- ▶ System components

4 System accessories

Cover profile

Illustration	Description	Length mm	Order no.	PU
	▶ For covering running components on front most door ▶ Can be shortened as required ▶ Grey plastic with paintable finish	2000	9 278 801	1 set
		individual	on request	100 ea.

Coloured set


- ▶ Self adhesive decorative tape for easy application to the visible surface of the runner profile

Illustration	Colour	Length mm	Order no.	PU
	black	2500	9 209 402	1 set
		4000	9 209 403	1 set
	white	2500	9 209 404	1 set
		4000	9 209 405	1 set
	champagne	2500	9 209 406	1 set
		4000	9 209 407	1 set

Adjustment fitting

Illustration	Description	Order no.	PU
	▶ Can be used for straightening warped furniture fronts or also as a precautionary measure to prevent doors from warping ▶ At least one set of adjustment fittings should be used per sliding door	9 252 651	1 set

Screws for attaching profile with screw slot

Illustration	Installation note	Description	Shelf thickness mm	Order no.	PU
		▶ For attaching runner and guide profiles to the cabinet body with screw slot ▶ Set contains 20 screws	16 - 19	9 130 078	1 set
			20 - 22	9 180 317	1 set
			22 - 25	9 180 318	1 set

Advice

- ▶ Locking systems
- ▶ Accessories for sliding and folding door systems
- ▶ Design advice



hettich.com/short/185611