


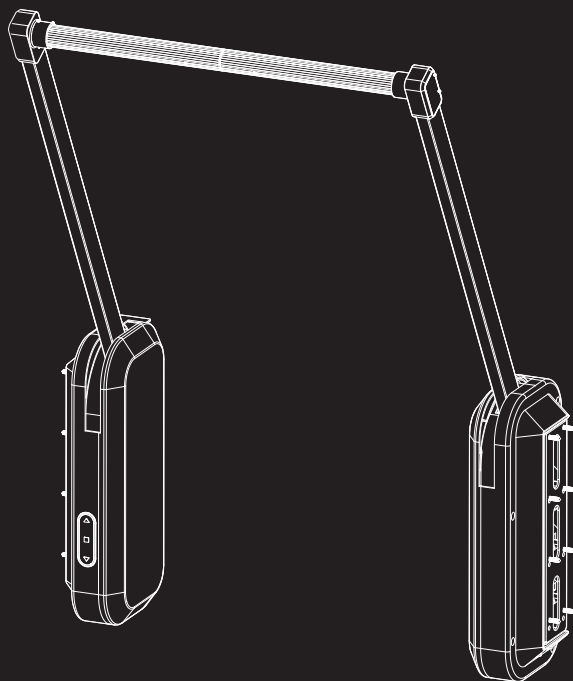


INSTALLATION

MANUAL FOR AUTOMATIC WARDROBE LIFT

REALIBLE FITTINGS ARE DURABLE FURNITURE


Accessories list as below

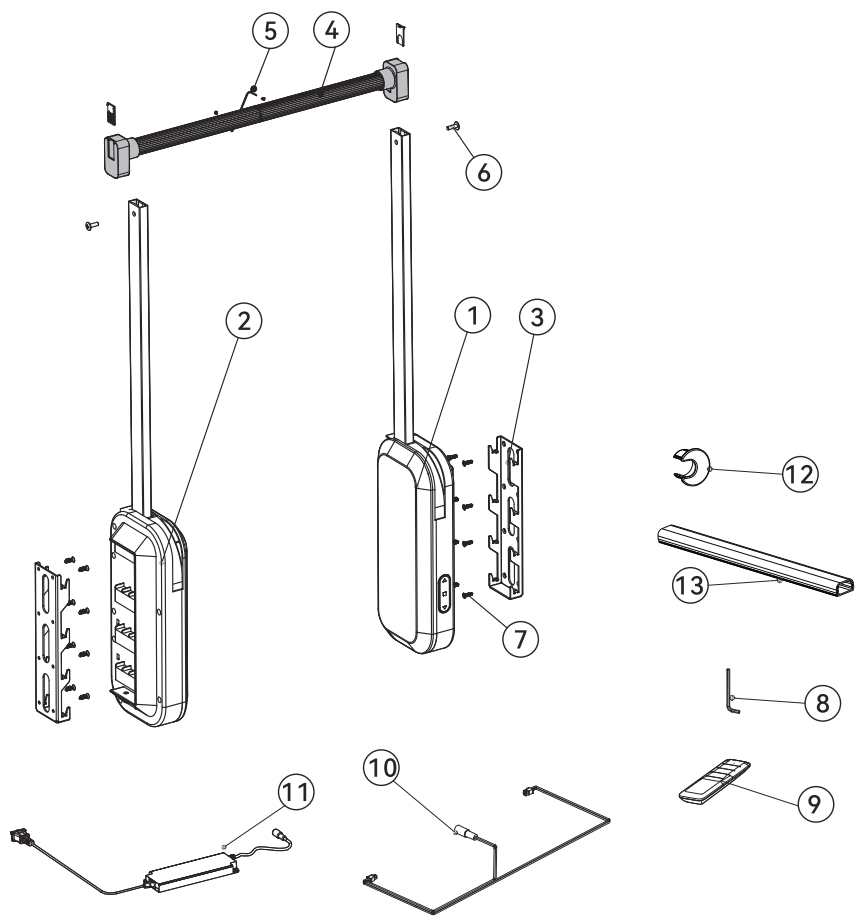

No.	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬
DESC.	Lifting hanger assembly (right)	Lifting hanger assembly (left)	Mounting brackets	Middle rod assembly	1.5mm Allen key	M6*35 Phillips flat head screw	T4*16 countersunk self-tapping	3.0mm Allen key	Remote control	Terminal connecting line	Power cord	Slot cover	Slot PVC stripe
QTY	1	1	2	1	1	2	16	1	1	1	1	2	2


Wiring methods: slotting position of cabinet

Cabinet parameters

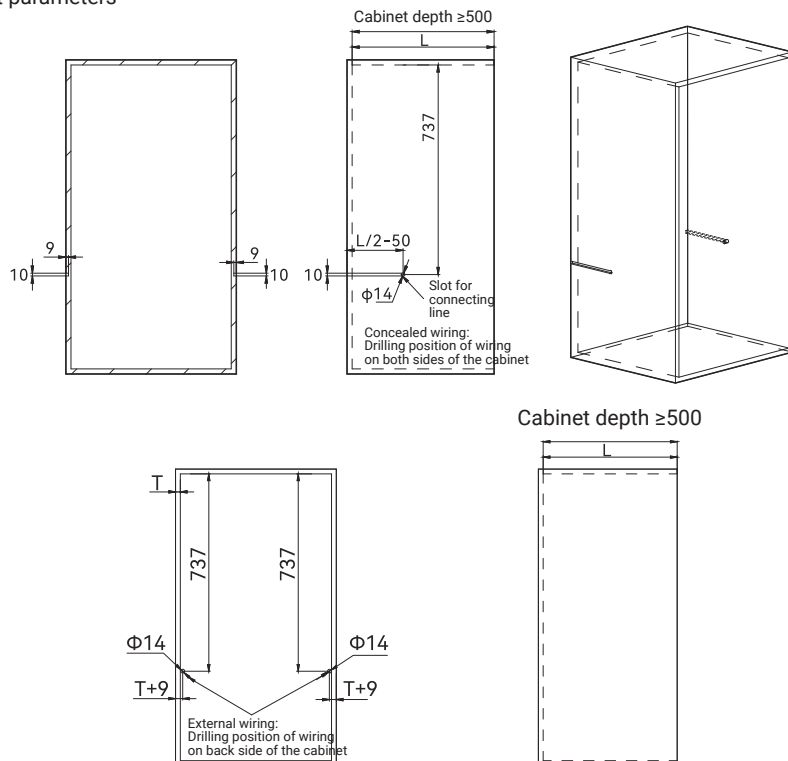


1. Installation steps


1.1 Concealed wiring: From the back side of the cabinet, divide the terminal lines into the cabinet in two ways through the slot hole at the left and right side of the cabinet.

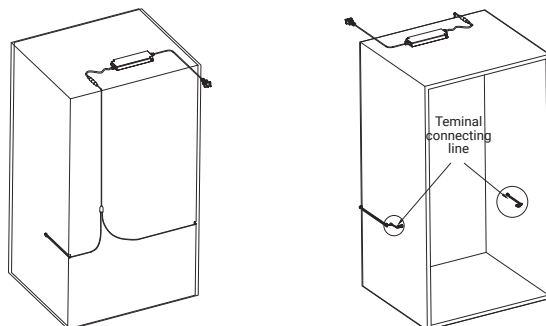

1.2 External wiring: From the back side of the cabinet, divide the terminal lines into the cabinet through the slot hole and wire slot cover at the back of the cabinet in two ways. Tear down the sticker on the bottom wire slot cover and stick it on the inner side of the cabinet, do not cover the slot.


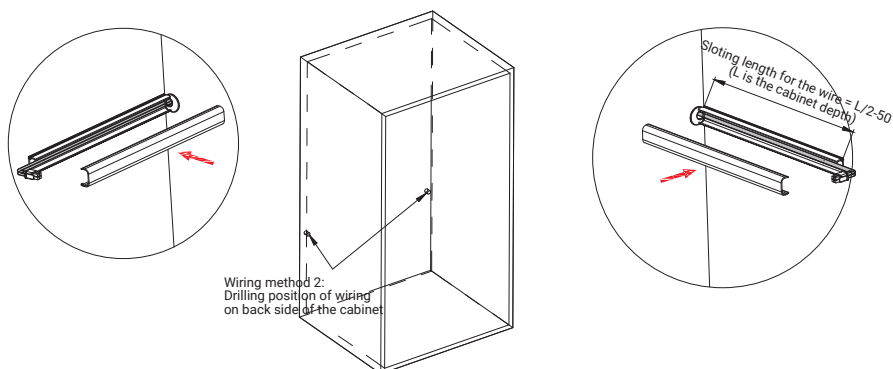


2. Install the left/right Mounting brackets on the two inner side panels of cabinet, mounting dimension please refer to below picture.


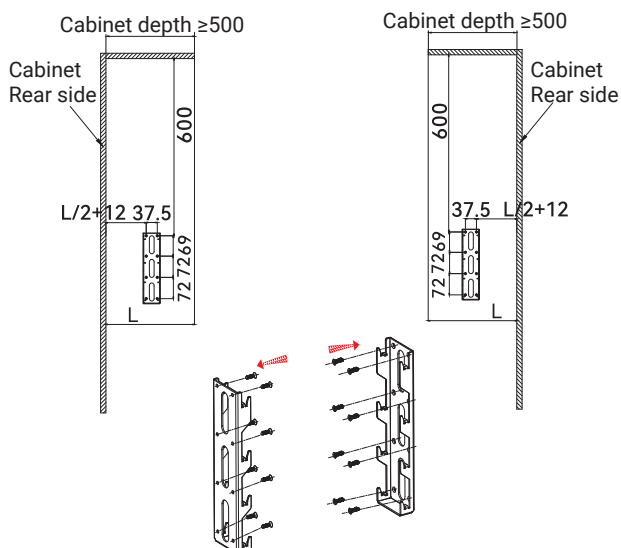


3.1 Pull out the right terminal connecting line over 150 mm from slot hole,insert the terminal to motherboard of the right Lifting hanger assembly.

3.2 Slide on the right Lifting hanger assembly to the Mounting brackets with hands, until it moves to the right position. Pls pay attention to the connecting line avoiding stacking into the device when sliding. After that tighten the two set screws with alien key.

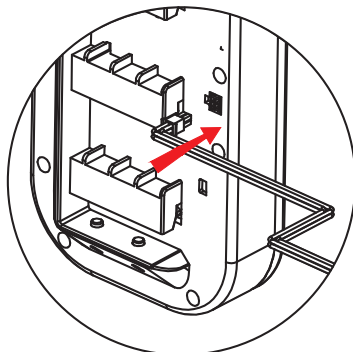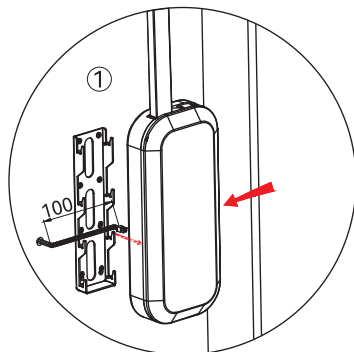

When Slide on the right Lifting hanger assembly to the Mounting brackets, the other hand need to pull the connecting line in case it: is sucked into the device.

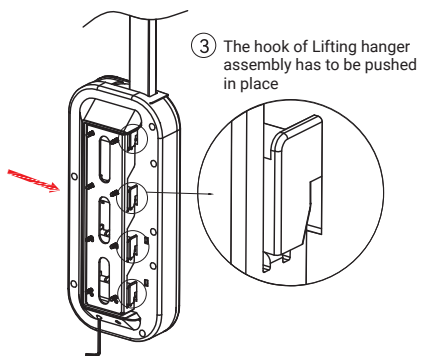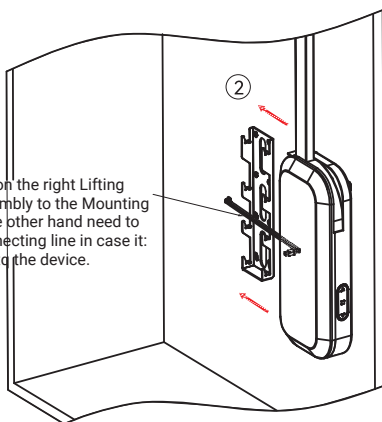


④ Tighten the two set screws with alien key


4.1 Similarly, pull out the left terminal connecting line over 150mm from slot hole, and insert the terminal to motherboard of the left Lifting hanger assembly.

4.2 Slide on the left Lifting hanger assembly to the Mounting brackets with hands, until it moves to the right position. Pls pay attention to the connecting line avoiding stacking into the device when sliding. After that tighten the two set screws with alien key.


5. Connect the plug of the terminal connecting line to the plug of the power cord
Connect AC plug

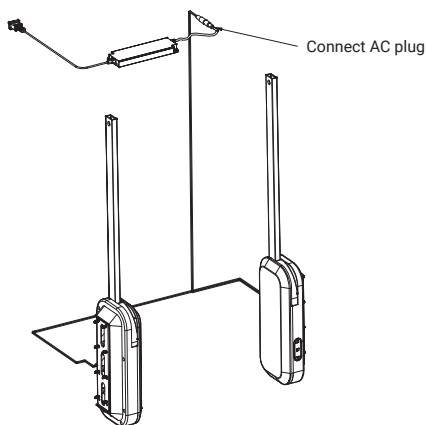



6. Plug in the power cord and turn it on, use remote control or sensor touch control to pull down the left/right robs to 90 degree, adjust the middle rob to appropriate width, then insert it to left/right robs and fix it with screws. Clip on the decorative cover in the end.

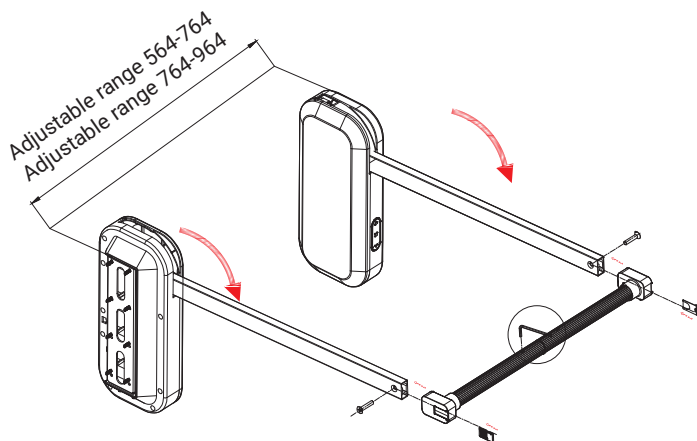

7. Adjust the middle rod assembly to appropriate width, then fastened by alien key.

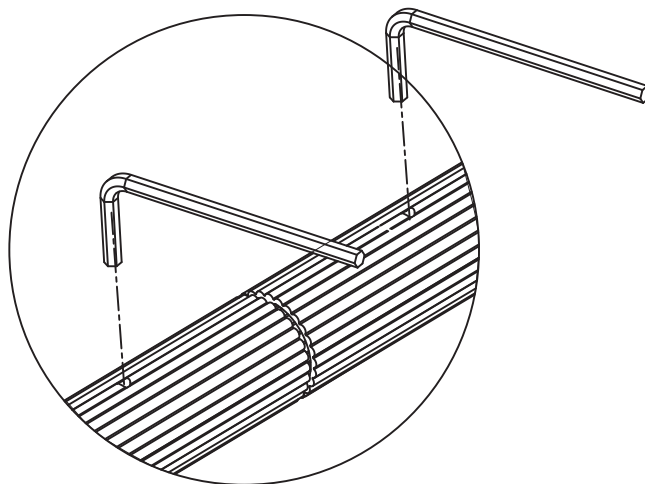


8. Test the product after installation. Use remote control or sensor touch control to rise the rod. It will stop automatically when it rises to the top. Press the down button to drop the rod. Or press the pause button to stop it during moving down. When the remote control or sensor control works normally, the testing is completed.

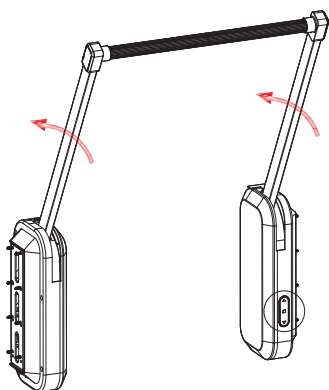

Caution: make sure both side (right/left) Lifting hanger assembly plug in power before turning on the wardrobe lift. Otherwise, the middle rod will be damaged if only one side electrical machinery works.


9. When the rod down to the right position, then use the Up button on the right swing arm of the rod to up the rod, convenient for users to up the rod after getting clothes.

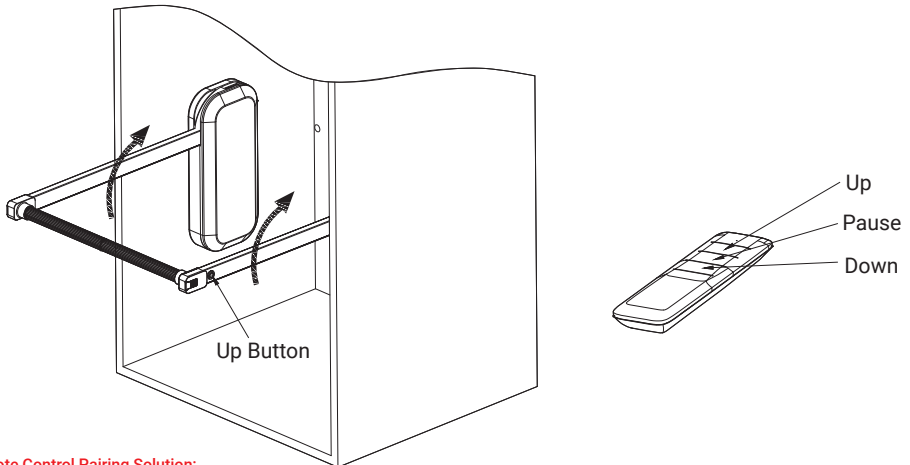

Remote Control Pairing Solution:

1. Press and hold the Pause button on the right swing arm control panel for 11 seconds, or voice command "Hello lift, Pair remote" to enter remote pairing mode.
2. Upon hearing the voice prompt "Remote pairing started," press and hold any button on the remote for approximately 5 seconds.
3. When you hear the voice prompt "Remote controller paired successfully," the remote is ready for use.

10. When the cabinet doors are closed, upon receiving a lowering command, the sensors will first detect whether the left and right cabinet doors are fully open. If the doors are detected as closed, the lowering operation will not execute, accompanied by a voice prompt: "Obstacle detected on the left/right side."

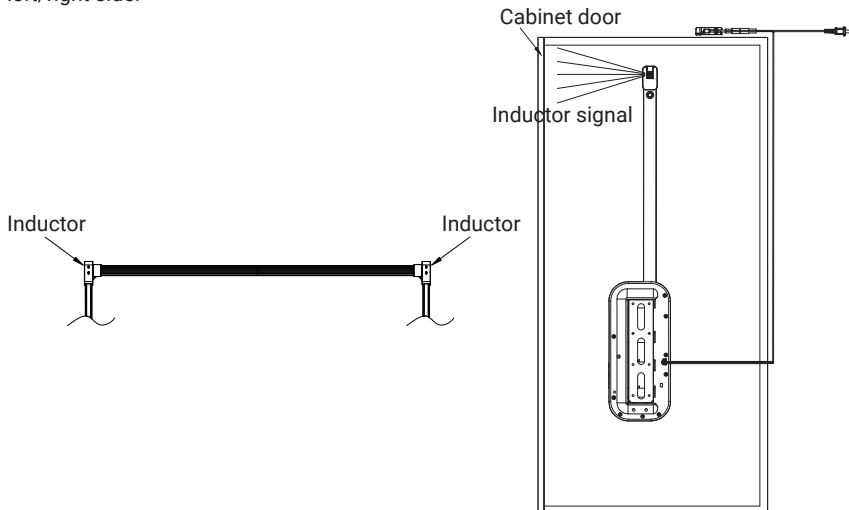

11. Voice control system command list
(Only for Product with Voice control function)

Wake up word

Hello Lift

Machine Response

Hello, I am coming

Exit command

Goodbye

Machine Response

Goodbye

Command word	Machine Response	Information prompt
1 Lift up	OK	1 Remote pairing started
2 Stop	OK	2 Remote controller paired successfully
3 Lift down	OK	3 Remote controller pairing failed
4 Pair remote	OK	4 Overload Warning
5 Reset device	OK	5 Left Motor Fault
6 Enable Mute Mode	OK	6 Right Motor Fault
7 Disable Mute Mode	OK	7 Obstacle detected on the left side
8 Volume down	OK	8 Obstacle detected on the right side
9 Volume Up	OK	9 Communication error
10 Volume min	OK	10 Please open the left door
11 Volume max	OK	11 Please open the right door
12 Disable Voice Recognition	OK	12 Left Arm reset completed
		13 Right Arm reset completed

viyar

0 (800) 100 100 | viyar.com